

## TEMPORARY OVERHEAD SERVICE

## 2024 EDITION



Aerial view of stud and braces. Note that the service lines extend at a 45 degree angle from within the braces

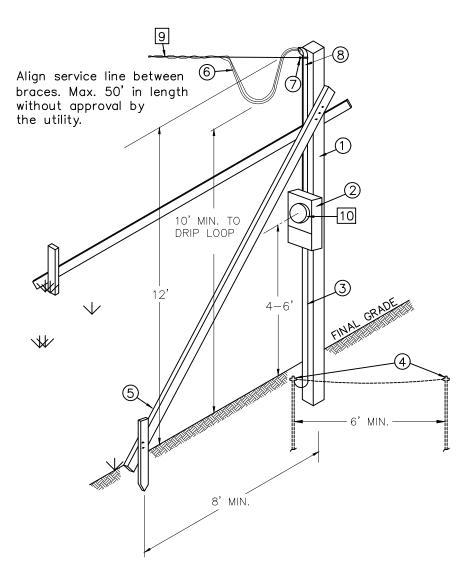

## NOTES:

- ANY TEMPORARY SERVICE OVER 50 FEET IN LENGTH MUST BE APPROVED BY THE UTILITY. LOCATION OF THE TEMPORARY SERVICE MAY REQUIRE ADDITIONAL POLE HEIGHT.
- 2. A METER POLE MAY BE USED IF A PERMANENT SERVICE ENTRANCE CANNOT BE INSTALLED ON A STRUCTURE. IF IT IS USED, A PERMANENT UTILITY POLE SHALL BE FURNISHED BY THE UTILITY. FOR FURTHER INFORMATION, SEE THE PERMANENT OVERHEAD METER POLE SPECIFICATION.

## ITEMS OWNED AND INSTALLED BY THE MEMBER:

- ITEMS OWNED AND INSTALLED BY THE UTILITY:
- 1. 6"x 6"x 14' MINIMUM CONTINUOUS SINGLE STRUCTURE
- 2. METER SOCKET AND DISTRIBUTION PANEL (100-200AMP, 120/240 VOLT)
- 3. GROUND WIRE IN ACCORDANCE WITH NEC
- 4. GROUND RODS IN ACCORDANCE WITH NEC
- 5. 2" x 4" BRACE (2 REQUIRED)
- 6. SERVICE ENTRANCE CONDUCTORS 24" OUT OF WEATHERHEAD
- 7. INSULATED CLEVIS
- 8. RISER AND WEATHERHEAD

- 9. SERVICE LINE 10. METER